





KFP 185

FABBRICATORI DI GHIACCIO GRANULARE
 MACHINES À GLACE EN GRAINS
 ICE FLAKE MACHINES
 FABRICADORES DE HIELO GRANULAR
 EISFLOCKENBEREITER

SERIE **KFP** 85 145 185 200 300 600 1200 2500

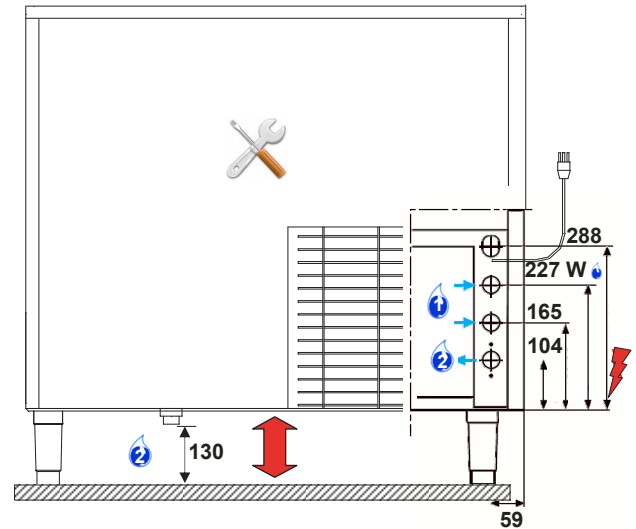


Stainless steel AISI 304

| | | |
|------------|--|--|
| L=1800 mm | | |
| ø 3/4" | | |
| ø 3/4" | | |
| 130÷140 mm | | |



| Kg / 24h - Air | | | |
|----------------|-----|-----|--|
| | 38° | 32° | |
| | 101 | 21° | |
| | 123 | 15° | |
| | 149 | 10° | |
| | 165 | | |

| Kg / 24h - Water | | | |
|------------------|-----|-----|--|
| | 38° | 32° | |
| | 120 | 21° | |
| | 138 | 15° | |
| | 164 | 10° | |
| | 170 | | |



KFP 185

FABBRICATORI DI GHIACCIO GRANULARE
MACHINES À GLACE EN GRAINS
ICE FLAKE MACHINES
FABRICADORES DE HIELO GRANULAR
EISFLOCKENBEREITER

Stainless steel AISI 304

Dati tecnici – Caractéristiques techniques – Technical specifications – Datos técnicos – Technische Daten

| | | |
|---|----------------|-----------------|
| Prod.Kg/24h +10°C - Prod.Lb/24h +10°C | | 165-363 |
| Prod.Kg/24h +10°C - Prod.Lb/24h +10°C | | 170-374 |
| Contenitore/Bac/Bin/Depósito/Behälter | Kg/Lb | 60-132 |
| Larghezza/Largeur/Width/Anchura/Breite | mm | 953 |
| Profondità/Profondeur/Depth/Profundidad/Tiefe | mm | 590 |
| Altezza/Hauteur/Height/Altura/Höhe | mm | 781 |
| Peso netto/Poids net/Net weight/Peso neto/Nettogewicht | Kg | 85 |
| Peso lordo/Poids brut/Gross weight/Peso bruto/Bruttogewicht | Kg | 91 |
| Vol. imballo/Vol.embal/Vol.(packed)/Volumen con embalaje/Verpackungsvolumen | m ³ | 0,63 |
| Alimentazione/Voltage/Voltaje/Anschlussspannung | V/Hz/ph | 230/50/1 |
| Compressore/Compresseur/Compressor/Compresor/Kompressor | HP | 1/2 |
| Compressore/Compresseur/Compressor/Compresor/Kompressor (T evap.= -10°C) | W | 676 |
| Watt - Totale/Total/Total/Total/Gesamt (T = +43°C) | W | 690 |
| Calorie/Calorie/Calorie/Caloria/Kalorie cond. | Kcal / h | 1040 |
| Ampère - Totale/Total/Total/Total/Gesamt | A | 4 |
| Fusibile/Fusible/Recommended fuse/Fusible/Netzsicherung | A | 10 |
| Refrigerante/Réfrigérant/Cooling gas/Refrigerante/Kühlmittel | R | 290 |
| Carica/Charge/Fill/Carga/Füllmenge | Kg | 0,100 |
| eq. CO ₂ | Kg | 0,300 |
| GWP | | 3 |
| Carica/Charge/Fill/Carga/Füllmenge | Kg | 0,077 |
| eq. CO ₂ | Kg | 0,231 |
| GWP | | 3 |
| Entrata acqua/Entrée eau/Water inlet/Entrada agua/Wasseranschluß | Ø | 3/4" |
| Scarico acqua/Vidange eau/Water outlet/Desague/Wasserabfluß | Ø | 3/4" |
| Acqua/Eau/Water/Agua/Wasser - lt / h | 21°C / 15°C | 7-21 |
| Pressione acqua/Pression eau/Water pressure/Presión agua/Wasserdruck - bar | min / max | 1 - 6 |
| Temp.ambiente/Temp.ambiant/Ambient temp./Temp.ambiente/Rammtemperatur - °C | min / max | 10 - 40 |
| Temp. acqua/Temp. eau/Water temp./Temp. agua/Wassertemperatur - °C | min / max | 5 - 35 |

