



ice line

MIGEL



KL 22

FABBRICATORI DI GHIACCIO IN CUBETTI
MACHINES À GLAÇONS
ICE CUBE MACHINES
FABRICADORES DE HIELO EN CUBITOS
EISWÜRFELBEREITER

SERIE **KL 18 20 22 32 42 52 62 72 102 132 152 172 302**




Air



Water



Stainless steel AISI 304

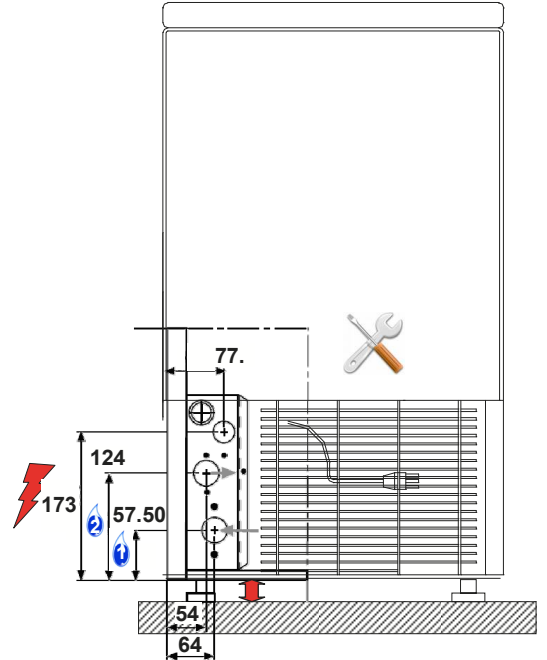

L=1800 mm		
ø 3/4"		
ø 3/4"		
32 ÷ 27 mm		

Kg / 24h - Air				
→				
←				
	38°	14	32°	
	32°	16	21°	
	21°	21	15°	
	10°	24	10°	

Kg / 24h - Water				
	38°	17	32°	
	32°	20	21°	
	21°	22	15°	
	10°	25	10°	




Filter
a richiesta
sur demande
on request
a petición
auf Anfrage



KL 32F - KL 42F

a richiesta • sur demande • on request
a petición • auf Anfrage

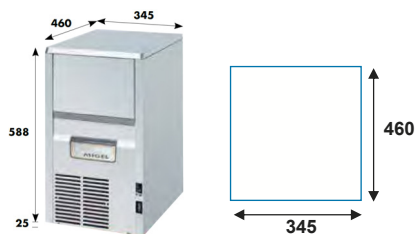

Stainless steel AISI 304



Ø 27 x 32



Air



Water

KL 22

FABBRICATORI DI GHIACCIO IN CUBETTI
MACHINES À GLAÇONS
ICE CUBE MACHINES
FABRICADORES DE HIELO EN CUBITOS
EISWÜRFELBEREITER

Dati tecnici – Caractéristiques techniques – Technical specifications – Datos técnicos – Technische Daten

Prod.Kg/24h +10°C - Prod.Lb/24h +10°C		24-52
Prod.Kg/24h +10°C - Prod.Lb/24h +10°C		25-55
Cubetti/Glaçons /cubes/cubitos/Würfel - n° /24h		1333
Cubetti/Glaçons /cubes/cubitos/Würfel - n° /24h		1388
Contenitore/Bac/Bin/Depósito/Behälter	Kg/Lb	6,5-14,3
Cubetti contenitore/Glaçons bac/Bin cubes/Depósito cubitos/Würfel Behälter	N°	360
Dimensione cubetto/Dimensions glaçons/Cubes sizing/Dim. cubitos/Würfelgröße	mm Ø	27 X 32
Larghezza/Largeur/Width/Anchura/Breite	mm	345
Profondità/Profondeur/Depth/Profundidad/Tiefe	mm	460
Altezza/Hauteur/Height/Altura/Höhe	mm	588
Peso netto/Poids net/Net weight/Peso neto/Nettogewicht	Kg	36
Peso lordo/Poids brut/Gross weight/Peso bruto/Bruttogewicht	Kg	40
Vol. imballo/Vol.embal/Vol.(packed)/Volumen con embalaje/Verpackungsvolumen	m ³	0,15
Alimentazione/Voltage/Voltaje/Anschlussspannung	V/Hz/ph	230/50/1
Compressore/Compresseur/Compressor/Compresor/Kompressor	HP	1/4
Compressore/Compresseur/Compressor/Compresor/Kompressor (T = -10°C)	W	343
Watt - Totale/Total/Total/Total/Gesaint (T = +43°C)	W	310
Calorie/Calorie/Calorie/Caloria/Kalorie cond.	Kcal / h	450
Ampère - Totale/Total/Total/Total/Gesamt	A	2,2
Fusibile/Fusible/Recommanded fuse/Fusible/Netzsicung	A	10
Refrigerante/Réfrigérant/Cooling gas/Refrigerante/Kühlmittel	R	290
Carica/Charge/Fill/Carga/Füllmenge	Kg	0,059
eq. CO ₂	Kg	0,177
GWP		3
Carica/Charge/Fill/Carga/Füllmenge	Kg	0,053
eq. CO ₂	Kg	0,159
GWP		3
Entrata acqua/Entrée eau/Water inlet/Entrada agua/Wasseranschluß	Ø	3/4"
Scarico acqua/Vidange eau/Water outlet/Desague/Wasserabfluß	Ø	3/4"
Acqua/Eau/Water/Agua/Wasser - lt / h 21°C / 15°C		5 - 10
Pressione acqua/Pression eau/Water pressure/Presión agua/Wasserdruck - bar	min / max	1 - 6
Temp.ambiente/Temp.ambient/Ambient temp./Temp.ambiente/Rammtemperatur - °C	min / max	10- 40
Temp. acqua/Temp. eau/Water temp./Temp. agua/Wassertemperatur - °C	min / max	5 - 35

