





KFP 600

FABBRICATORI DI GHIACCIO GRANULARE PRESSATO
 MACHINES À GLACE EN GRAINS PRESSÉE
 ICE FLAKE MACHINES - PRESSED ICE FLAKES
 FABRICADORES DE HIELO GRANULAR PRENSADO
 EISFLOCKENBEREITER GEPRÉSSTE EISFLOCKEN

SERIE **KFP** 85 145 200 300 600 1200 2500



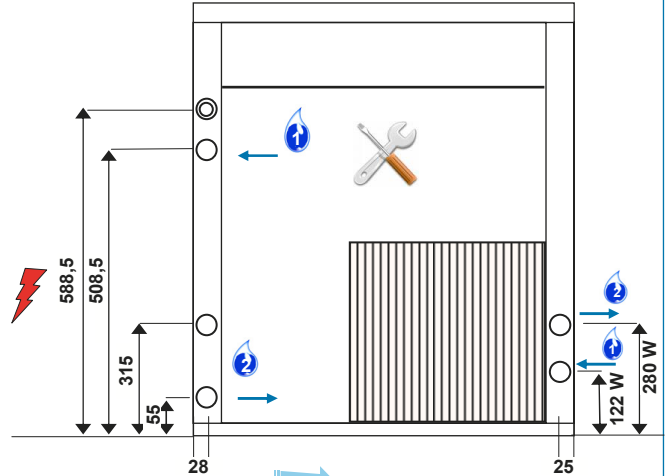


USCITA GHIACCIO
 SORTIE GLACE
 ICE EXIT
 SALIDA DE HIELO
 EISAUSGANG

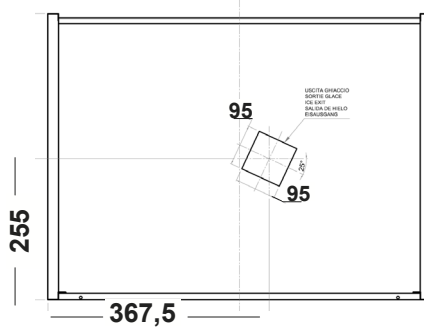

Air
Water
Stainless steel AISI 304

L=1800 mm		
ø 3/4"		
ø 3/4"		
130÷140 mm		

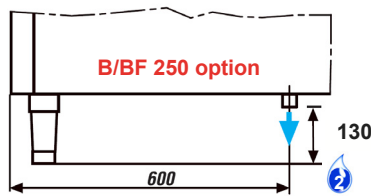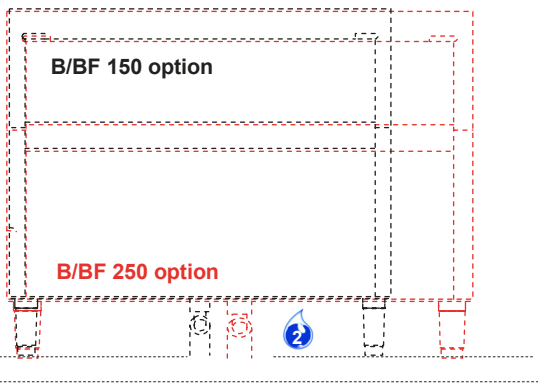


Kg / 24h - Air

	38°	295	32°	
	32°	350	21°	
	21°	425	15°	
	10°	475	10°	


Kg / 24h - Water

	38°	325	32°	
	32°	375	21°	
	21°	425	15°	
	10°	475	10°	

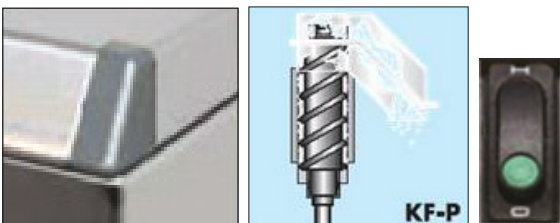



Stainless steel AISI 304



Air



Water

KFP 600

FABBRICATORI DI GHIACCIO GRANULARE PRESSATO
 MACHINES À GLACE EN GRAINS PRESSÉE
 ICE FLAKE MACHINES - PRESSED ICE FLAKES
 FABRICADORES DE HIELO GRANULAR PRENSADO
 EISFLOCKENBEREITER GEPRESSTE EISFLOCKEN

Dati tecnici – Caractéristiques techniques – Technical specifications – Datos técnicos – Technische Daten

Prod.Kg/24h +10°C - Prod.Lb/24h +10°C		475-1045
Prod.Kg/24h +10°C - Prod.Lb/24h +10°C		475-1045
Contenitore/Bac/Bin/Depósito/Behälter OPTION B/BF 150	Kg/Lb	150-330
Contenitore/Bac/Bin/Depósito/Behälter OPTION B/BF 250	Kg/Lb	250-550
Larghezza/Largeur/Width/Anchura/Breite	mm	620
Profondità/Profondeur/Depth/Profundidad/Tiefe	mm	640
Altezza/Hauteur/Height/Altura/Höhe	mm	790
Peso netto/Poids net/Net weight/Peso neto/Nettogewicht	Kg	93
Peso lordo/Poids brut/Gross weight/Peso bruto/Bruttogewicht	Kg	100
Vol. imballo/Vol.embal/Vol.(packed)/Volumen con embalaje/Verpackungsvolumen	m ³	0,58
Alimentazione/Voltage/Voltaje/Anschlusspannung	V/Hz/ph	230/50/1
Compressore/Compresseur/Compressor/Compresor/Kompressor	HP	1,7
Compressore/Compresseur/Compressor/Compresor/Kompressor (T evap.= -15°C)	W	2350
Watt - Totale/Total/Total/Total/Gesaint (T = +43°C)	W	1950
Calorie/Calorie/Calorie/Caloria/Kalorie cond.	Kcal / h	2420
Ampère - Totale/Total/Total/Total/Gesamt	A	9,9
Fusibile/Fusible/Recommended fuse/Fusible/Netzsicung	A	20
Refrigerante/Réfrigérant/Cooling gas/Refrigerante/Kühlmittel	R	290
Carica/Charge/Fill/Carga/Füllmenge	Kg	0,130
eq. CO ₂	Kg	0,390
GWP		3
Carica/Charge/Fill/Carga/Füllmenge	Kg	0,090
eq. CO ₂	Kg	0,270
GWP		3
Entrata acqua/Entrée eau/Water inlet/Entrada agua/Wasseranschluß	Ø	3/4"
Scarico acqua/Vidange eau/Water outlet/Desague/Wasserabfluß	Ø	3/4"
Acqua/Eau/Water/Agua/Wasser - lt / h 21°C / 15°C		22-56
Pressione acqua/Pression eau/Water pressure/Presión agua/Wasserdruck - bar	min / max	1 - 6
Temp.ambiente/Temp.ambient/Ambient temp./Temp.ambiente/Rammtemperatur - °C	min / max	10 - 40
Temp. acqua/Temp. eau/Water temp./Temp. agua/Wassertemperatur - °C	min / max	5 - 35